truebner

true excellence in instrumentation

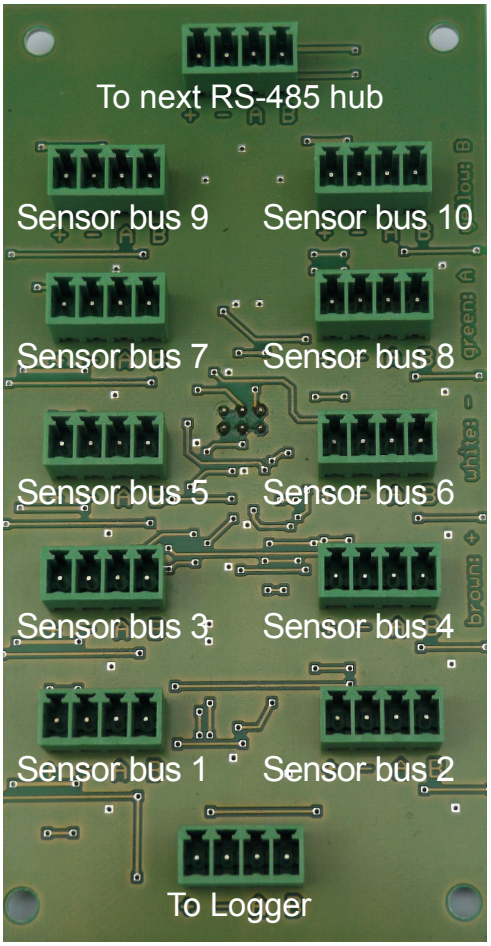

- RS-485 Hub
- 10 active sensor bus ports
- Extensible for additional hubs

» Active RS-485 Hub

english

www.truebner.de

Active RS-485 hub

SPECIFICATION

General:	RS-485 with 10 active sensor bus ports Logger port: RS-485 Extension port: RS-485 to next hub
Dimensions:	70 mm x 134 mm
Baudrate:	9600 baud
Connector pin assignment:	 brown = +Vbat white = GND green = RS-485 A yellow = RS-485 B Logger port: +Vbat is input voltage Extension port: +Vbat is output port Sensor bus ports: +Vbat is output port